



pest management information and technology at its best

Wireless Inspection Camera with Colour LCD Monitor

Ideal for timber, commercial and domestic pest inspections

Your Extended Eyes & Hands!

Allows for easy visual inspection of hard-to-reach areas including wall cavities, sub-floors, voids and ceilings. Lightweight, handheld design. An essential and economical aid to find, diagnose and solve pest problems with the flexible extended tube & useful accessories.



Wide range of uses...

- Checking for termite and general pest entry points into a building
- Locating, videoing and photographing termite damage in concealed situations
- Inspecting inside roof and floor areas - top/bottom plates
- Examining pest harbourages under domestic and commercial fridges and equipment
- Finding cabling inside wall cavities before applying pest treatments
- Wireless monitor feature allows you to complete an inspection or locate a problem while your client views from the video monitor five meters and more away
- Supplied with a 2Gig Micro SD card for downloading images to your computer (see following page).
- Includes a 1 metre extension and can be extended to 3 metres with optional extensions sold separately. Also can be upgraded to an 8mm mini camera.

Incredibly low cost, suitable to supply all your technicians...

Now Available:



**Pest Management Products | Training | Consulting
Cleaner | Greener | Smarter | Pest IT**

**Unit 5, 74-76 Oak Road, Kirrawee, NSW Australia 2232
PO Box 530 Bangalow, NSW, Australia 2479**

Email: Info@pestIT.com

**Ph 1300 66 56 57 | Fax 1300 66 56 17
www.pestIT.com**

SPECIFICATIONS


CAMERA	Mode No.	GB8802
	Imaging Sensor	CMOS
	Total Pixels	704 × 576 (PAL); 712 × 486(NTSC)
	Horizontal View Angle	50 degree
	Transmission Frequency	2468MHz
	Minimum Illumination	0 Lux
	Modulation Type	FM
	Bandwidth	18MHz
	Power Supply	4 x AA batteries
	Unobstructed Effective Range	10m
	Waterproof Capacity	IP67(only for imager head)
	Dimensions(W × D × H)	186 x 145 x 41(mm)(Exclude Flexible Tube)
	Weight(about)	530g
MONITOR	Mode No.	GB7307
	LCD Screen Type	3.5" TFT-LCD
	Effective Pixels	320(R.G.B.) × 240
	Video System	PAL/NTSC
	Transmission Frequency	2414MHz,243 2MHz,2450M Hz,2468MHz
	Exterior Supply Voltage	5V _{DC}
	Consumption Current (Max.)	500mA
	Charge Time	3 hours
	Work Time	2 hours
	Picture/Video Pixels	640 x 480
	Video Size	27M byte/minute
	Frame Rate	30 frame/second
	Video Output Level	0.9-1.3V _{pp} @75ohm
Receiving Sensitivity	≤85dBm	
Dimensions(W x D x H)	100 x70 x 25 (mm)	
Weight(About)	140g	
Operating Temperature	-10 °C~+50 °C/+14 °F~+122 °F	
Operating Humidity	15%~85%RH	

INSPECTION TOOL



Remove the micro SD card from the monitor

Review the recorded files on a laptop PC

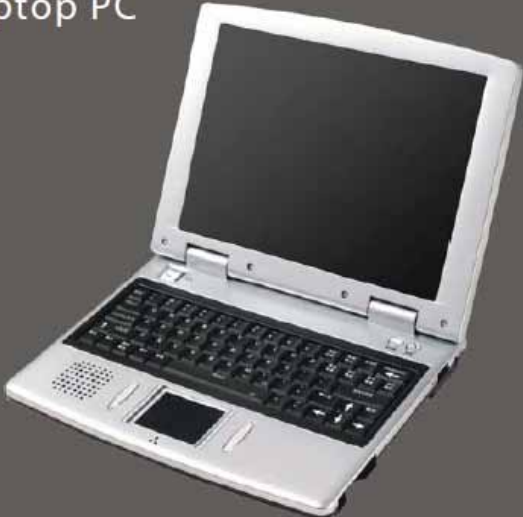

EASY OBSERVATION

